


Gates Couplings

Leak-free fluid conveyance

GATES COUPLINGS

- TWO PIECE COUPLING
- UNIQUE DESIGN TO WITHSTAND OVER TORQUING
- TIGHT TOLERANCES TO ENSURE LEAK FREE PERFORMANCE
- SPECIAL DRY LUBED O RINGS
- SUPERIOR CHROMIUM FREE ZINC PLATING
- PERFORMS BEST WITH 'GATES HOSE'

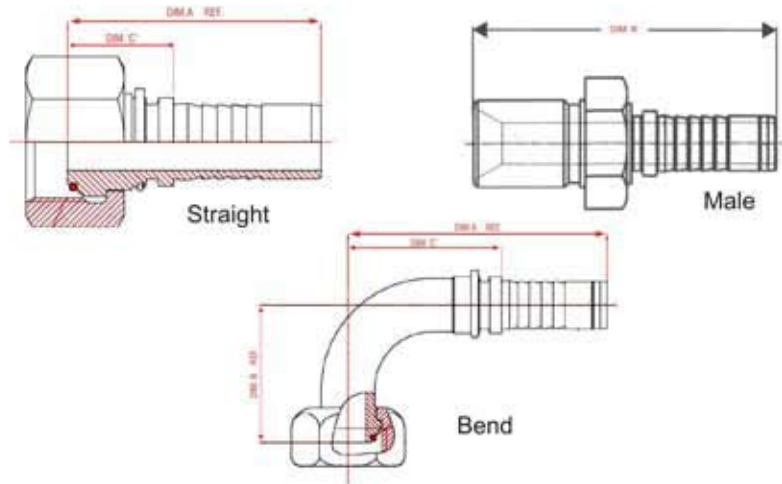

GATES BSP COUPLING

S. No.	Coupling Item Code	Description	A mm	C mm	B mm
1	DOM-M-1001	3/16" BSP Female Straight	40.0	14.8	-
2	DOM-M-1002	1/4" BSP Female Straight	40.0	14.0	-
3	DOM-M-1004	3/8" BSP Female Straight	41.2	15.2	-
4	DOM-M-1006	1/2" BSP Female Straight	45.0	16.0	-
5	DOM-M-1021	1/2" BSP female Straight (5/8" end)	46.2	17.2	-
6	DOM-M-1022	5/8" BSP Female Straight	49.6	17.6	-
7	DOM-M-1010	3/4" BSP Female Straight	71.0	20.0	-
8	DOM-M-1012	1" BSP Female Straight	84.5	27.7	-
9	DOM-M-1005	1/2" BSP Male Straight	73.0	44.0	-
10	DOM-M-1023	5/8" BSP Male Straight	80.0	48.0	-
11	DOM-M-1019	1/4" BSP Female 90 Degree	49.0	23.0	23.5
12	DOM-M-1020	3/8" BSP Female 90 Degree	56.5	30.5	32.0
13	DOM-M-1017	1/2" BSP Female 90 Degree	71.0	42.0	37.5
14	DOM-M-1014	5/8" BSP Female 90 Degree	78.5	46.5	46.0
15	DOM-M-1016	3/4" BSP Female 90 Degree	116.0	65.0	55.0
16	DOM-M-1018	3/4" BSP Female 45 Degree	115.4	64.4	28.3
17	DOM-M-1013	1" BSP Female 90 Degree	133.9	77.1	62.0
18	DOM-M-1015	3/16" BSP Female 90 Degree	42.0	16.8	19.0

GATES BHL HOSE RANGE

Hose ID	Max W. P. (Bar)	Minimum B. P. (Bar)	Minimum B. R. (mm)
1/4"	350	1600	50
3/8"	330	1320	60
1/2"	275	1100	75
5/8"	275	1100	90

Authorised Distributor

